

# MSP 210V


Best bridge for broadcasting VGA to SDI application!



## Key Features

- VGA signals can be converted to SDI
- L/R audio signals or AES/EBU digital audio can be inserted and embedded
- SDI output up to 3G-SDI is supported
- Configure by on board DIP switch

## Dimensions




## Specification

Connectors	Input	1 × VGA	
	Audio Input	2 × Analog audio	
	Output	1 × SDI	
	Power	5.4mm DC Socket	
Performance	Input Resolution	VGA:	800×600@60   1024×768@60   1280×720@60   1280×768@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1440×900@60   1400×1050@60   1600×1200@60   1680×1050@60   1920×1080@60
	Output Resolution	SDI:	480i   576i   720p@50/60   1080i@50/60   1080p@50/60
	Supported Standards	VGA:	VGA-UXGA
		SDI:	SD-SDI, HD-SDI, 3G-SDI
Power	Input Voltage	12V DC (via universal Plug Pack)	
	Max Power	1.5A	
Environment	Temperature	0°C~45°C	
	Humidity	10%~85%	
Physical	Weight	0.3kg (Net Weight)	
		0.61kg (Package Weight)	
	Dimensions	95.8mm x 92.9mm x 45mm (Device Dimension)	
		140mm x 160mm x 100mm (Package Dimension)	

## Order Codes

Product Code	Item
600-0210-05-0	MSP 210V - VGA   SDI with Scan Converter

## Application

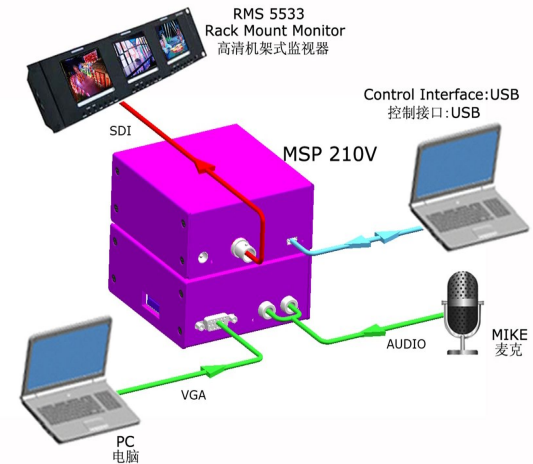

Tel: +86-592-5771197 Fax: +86-592-5788216  
 E-mail: sales@rgbink.com http://www.rgbink.com  
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial  
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.