

TAO 1tiny 2



Key Features

- 4K UVC camera to HDMI conversion
- Network streaming decoding: RTSP/RTMP
- Low Power consumption
- Ethernet port for NDI encoding/decoding
- Power from standard USB-C PD PSU's


Specification

Connectors	Input	Type-C	1 × USB-C
		USB 2.0	1 × USB-A (Receiver Input for Remote Control or UVC Camera Input)
	Output	HDMI 2.0	1 × HDMI-A
	Power	Type-C	1 × USB-C
	Ethernet	LAN	1 × RJ45
Performance	Input Resolutions	USB-C	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30
		VESA	1280 × 720@30/50/60 1280 × 768@60 1920 × 1080@25/30/50/60 3840 × 2160@30
	Output Resolutions	HDMI	
		SMPTE	1080p@30/50/60 2160p@30
		VESA	1280 × 720@30/50/60 1280 × 768@60 1920 × 1080@25/30/50/60 3840 × 2160@60
	Supported Standard	HDMI	2.0
		USB	3.0
	Video Encoding	MJPEG H.264 H.265	
	Streaming Protocols	RTMP/RTSP/NDI	
NDI Features	NDI Encoding	NDI HX , up to 1920 x 1080@30	
	NDI Decoding	NDI HX, NDI HX2, NDI HX3, up to 3840 x 2160@60	
Compatibility	Camera with UVC1.1/UVC1.5 protocol		
Compatibility Tested	RGBlink	mini, mini-pro, mini-edge, mini-mx, vue PTZ 2K	
	Blackmagic Design	ATEM mini	
	DJI	Osmo Action 5, Osmo Action 4, POCKET 3	
	Insta 360	X3, link UHD 4K AI	
	OBSBOT	tiny 2K, tiny 4K, meet 2K, meet 4K	
Power	Input Voltage	9V/2A (depends on adapter)	
	Max Power	18W	
Environment	Temperature	0°C ~55°C	
	Humidity	20%~55%	
Physical	Weight	Net	0.2kg
	Dimension	Net	110mm × 64.5mm × 25.4mm


*Power of Adapter is not less than:9V/2A/18W;Do not use the USB port of the computer for power supply

Application


How to work with USB camera with TAO 1tiny 2

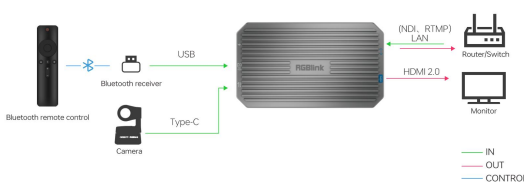

How to work with streaming switcher with TAO 1tiny 2

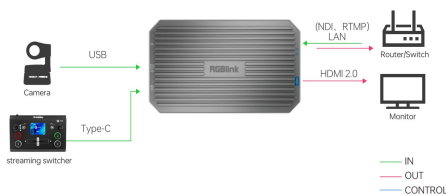

Dimension

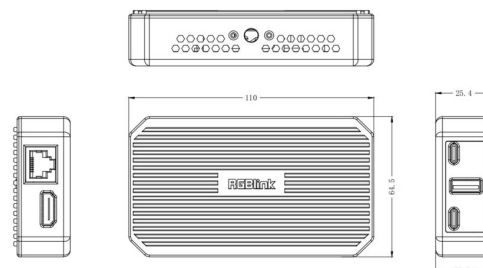

Order Codes

Product Code	Item
410-5513-12-0	TAO 1tiny 2

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

