

# RMS1A



RMS1A with Desktop Accessory

## Key Features

- Compact size for versatile mounting
- Display 2K resolutions
- Auto detect a wide range of resolution
- DVI input and loop
- Preview media file from USB
- Range of mounting accessory options




2pcs RMS1A in 19inch rack accessory

## Application



## Dimensions

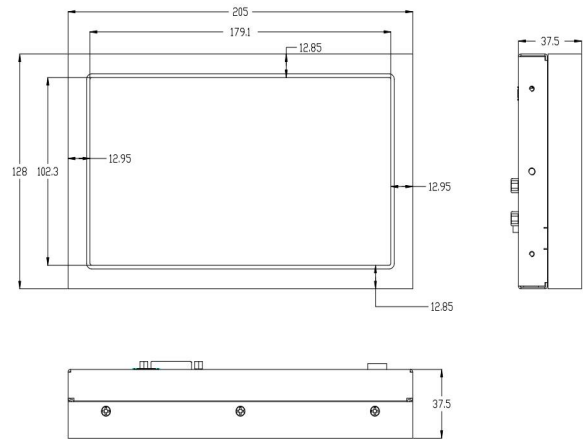

## Order Codes

Product Code	Item
410-8424-01-0	RMS1A
410-8424-02-0	2pcs RMS1A in 19inch rack accessory
410-8424-03-0	RMS1A with Desktop Accessory
410-8424-04-0	Dual monitor rack set
410-8424-05-0	Single monitor desktop set



## Specification

<b>Connectors</b>	Input	1xDVI-I   1xUSB-A		
	Loop Out	DVI-I		
<b>Performance</b>	Input Resolutions	DVI	480i@60   480p@60   576p@50   720p@50/60   1080i@50/60   1080p@50/60	
		SMPTE	480i@60   480p@60   576p@50   720p@50/60   1080i@50/60   1080p@50/60	
	VESA	640x480@60   800x600@60   1024x768@60   1920x1200@60   1280x1204@60   1440x1440@60   1440x1530@60   1523x1536@60   1600x1200@60   2048x1152@60   2560x816@60		
Supported Standard	DVI	Single Link		
	VGA	UXGA		
<b>Features</b>	Screen Size	8 Inch		
	Native Resolution	1024x600px		
	Native Display Ratio	16:09		
	Contrast	700:1		
	Viewing Angle	140°x140°		
	Brightness (Max)	500cd/m2		
	Display Refresh	15KHz – 120KHz		
<b>Power</b>	Input Voltage	DC 12V (via fitted universal plug-in pack)		
	Max Power	24W		
<b>Environment</b>	Temperature	0°C~40°C		
	Hudmidity	10%~85%		
<b>Physical</b>	Weight	Nett	0.9kg	
		Packaged	2kg	
	Dimension	Nett	205mmx128mmx38mm	
		Packaged	350mmx260mmx65mm	

\*When EXT4F-OS Splicing Output is installed, any HDBaseT input must be configured to 1080p resolution.

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com  
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**<sup>®</sup>

www.rgblink.com

