





Key Features

- Single port support up to 24 layers
- Each layer support for scaling, moving, crossing and overlying
- support for 16 In 16 Out
- Up to 16 IP inputs via H.265 decoding , resolution up to 1080P
- Preview inputs
- Realtime streaming back
- Background picture import
- OSD

Application

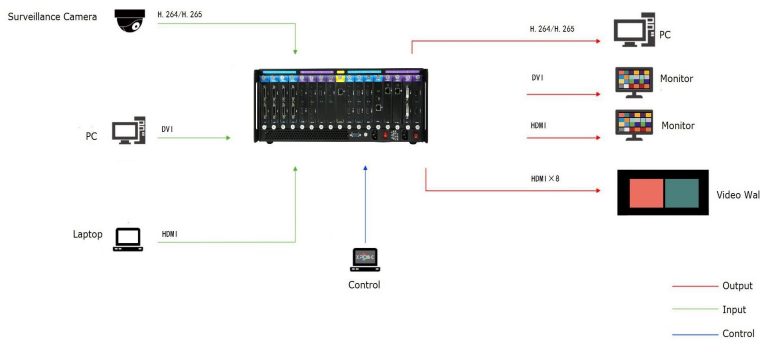

Dimensions

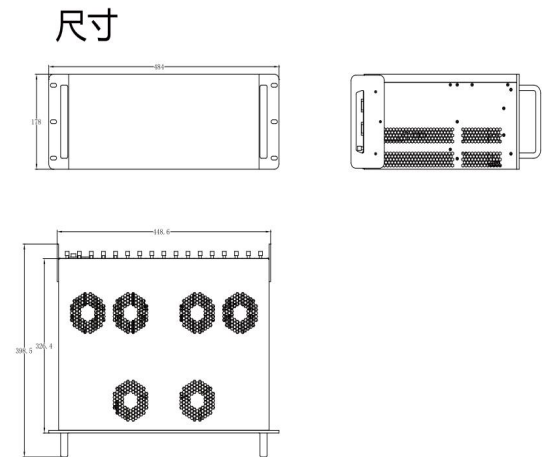

Order Codes

Product Code	Item
711-0016-00-0	Q16
791-0016-01-0	Single HDMI 1.4 Input Module
791-0016-02-0	Dual HDMI1.3 Input Module
791-0016-04-0	Dual VGA Input Module
791-0016-05-0	Dual DVI Input Module
791-0016-07-0	IP Streaming Input Module

Product Code	Item
791-0016-21-0	DVI Output Module
791-0016-22-0	HDMI 1.3 Output Module
791-0016-24-0	H.265 Streaming Preview Module



Specification

Connectors	Input	<i>support up to 16 inputs</i>		
		<i>Select from</i>	DVI Module 2×DVI-D (Compatible with HDMI) VGA Module 2×DB15 HDMI 1.3 Module 2×HDMI-A HDMI 1.4 Module 1×HDMI-A H.265 Streaming Module 1×RJ45	
	Output	<i>support up to 16 outputs</i>		
		<i>Select from</i>	DVI Module 2×DVI-I HDMI1.3 Module 2×HDMI-A	
	PVW	H.265	1×HDMI-A 1×RJ 45	
	Communication	LAN	1×RJ45	
Performance	Input Resolutions	DVI		
		SMPTE	720p@59.94/60 1080i@50/59.94/60 1080p@50/59.94/60	
		VESA	1024×768@60 1280×1024@60 1600×1200@60 1920×1080@60	
		VGA		
	VESA	800×600@60 1024×768@60 1280×1024@60 1280×720@60 1440×900@60		
	HDMI			
	SMPTE	720p@59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30		
	VESA	1024×768@60 1280×1024@60 1440×900@60 1920×1080@60 3840×2160@30		
	H.264/H.265			
		176×144 240×180 320×180 320×240 320×256 352×228 352×480 400×224 400×320 480×270 480×272 480×320 480×360 480×480 544×480 608×448 640 × 360 640×480 704×576 720×404 720×480 720×540 720×576 850×480 1024×576 1280×720 1680×1056 1920×1080		
	Output Resolutions	DVI HDMI		
		SMPTE	720p@50/60 1080p@25/30/50/60	
		VESA	800×600@60 1024×768@60 1280×1024@60 1400×1050@60 1360×768@60 1920×1080@60	
	Supported Standard	H.265	ITU-T H.265/ ISO/IEC 23008-2	
		HDMI	1.4	
		DVI	1.0	
Power	Input Voltage	100V-240V 50/60-Hz auto adjusting		
	Max Power	250W		
Enviroment	Temperature	-30℃~50℃		
	Humidity	10%~85%		
Physical	Weight	Net	12.1kg	
		Packaged	15.1kg	
	Dimension	Net	484mm×398.5mm×178mm	
		Packaged	645mm×525mm×295mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink[®]

www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.