

MSP 210D



Best bridge for broadcasting Displayport to SDI application!



Key Features

- Displayport can be converted to SDI
- L/R audio signals or AES/EBU digital audio can be inserted and embedded
- SDI output up to 3G-SDI is supported
- Configure by on board DIP switch

Dimensions




Specification

Connectors	Input	1 × Displayport		
	Audio Input	2 × Analog audio		
	Output	1 × SDI		
	Power	5.4mm DC Socket		
Performance	Input Resolution	Displayport:	800×600@60 1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60	
	Output Resolution	SDI:	480i 576i 720p@50/60 1080i@50/60 1080p@50/60	
	Supported Standards	DP:	1.0	
		SDI:	SD-SDI, HD-SDI, 3G-SDI	
Power	Input Voltage	12V DC (via universal Plug Pack)		
	Max Power	1.5A		
Environment	Temperature	0°C~45°C		
	Humidity	10%~85%		
Physical	Weight	0.3kg (Net Weight) 0.61kg (Package Weight)		
	Dimensions	95.8mm x 92.9mm x 45mm (Device Dimension)		
		140mm x 160mm x 100mm (Package Dimension)		

Order Codes

Product Code	Item
600-0210-03-0	MSP 210D - DISPLAYPORT SDI with Scan Convertor

Application

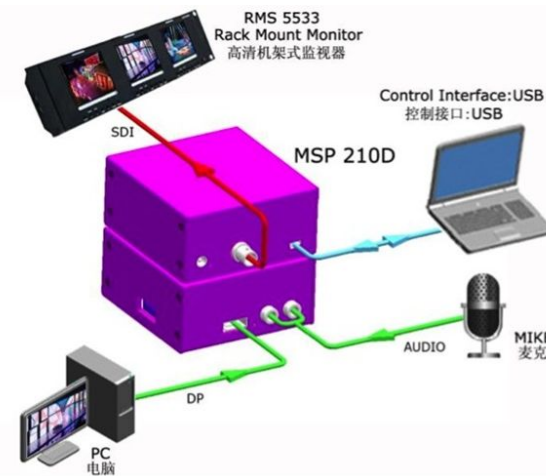

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com http://www.rgbink.com
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.