

MSP 227 Up/Down Mini Cross Converter




Key Features

- Cross convert input of AV/YPbPr/VGA/DVI/HDMI to any output of AV/YPbPr/VGA/DVI/HDMI
- Picture mode selection
- Color temperature selection
- Auto adjust for screen
- System setup and menu configuration via buttons
- Dial Switch on the bottom to set output format
- Supported input/output resolution up to 1920x1080@60
- HDCP compliant

Specification

Connectors	Input	1x DVI-I		
	Output	1x DVI-I		
	Communication	1x USB Type A		
Performance	Input Resolutions	DVI HDMI SMPTE 480i 576i 720p@50/59.94/60Hz 1080i@50/59.94/60Hz 1080p@50/59.94/60Hz VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 VGA VESA 640x480@60 800x600@60 1024x768@60 1280x1024@60 1366x768@60 1440x900@60 1600x1200@60 1920x1080@60 YPbPr SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@60 AV SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@60		
		Output Resolutions	DVI HDMI SMPTE 480i 576i 720p@50/59.94/60Hz 1080i@50/59.94/60Hz 1080p@50/59.94/60Hz VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 VGA VESA 640x480@60 800x600@60 1024x768@60 1280x1024@60 1366x768@60 1440x900@60 1600x1200@60 1920x1080@60 YPbPr SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@60 AV SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@60	
			Supported Standard	DVI Single Link DVI HDMI HDMI 1.3 VGA UXGA
			Power	Input Voltage DC 12V, 1.5A Max Power 24W
Environment	Temperature		0~45°C	
	Humidity	10%~85%		
Physical	Weight	Nett 0.35 kg Packaged 0.5kg		
		Dimensions	Nett 142mmx90mmx24mm Packaged 170mmx120mmx80mm	


Application

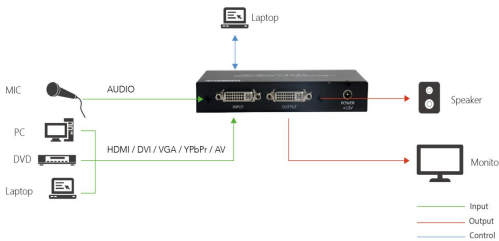

Order Codes

Product Code	Item
601-0227-01-0	MSP 227

Dimensions

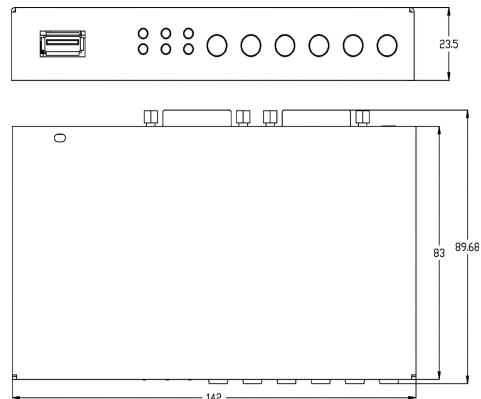

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink

www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.