


# MSP 215


## HDMI Extender

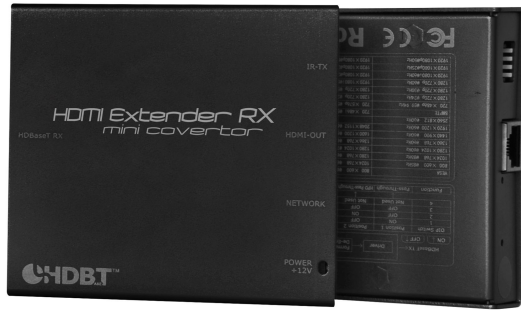

### Key Features

- Extend HDMI easily via CAT5 or CAT6 cables with HDBaseT®
- Delivered as a set of two, with a transmitter and receiver
- Extend up to 60m over CAT 5 cable or up to 260m on CAT 6 cables
- Support 4K ULTRA HD resolutions (up to 3840x2160 @30Hz) and 1080p Full HD (1920x1080 @ 60Hz)
- Support the pass-through of HDCP and High Bit Rate (HBR) lossless audio formats
- 3D content is supported

### Dimensions

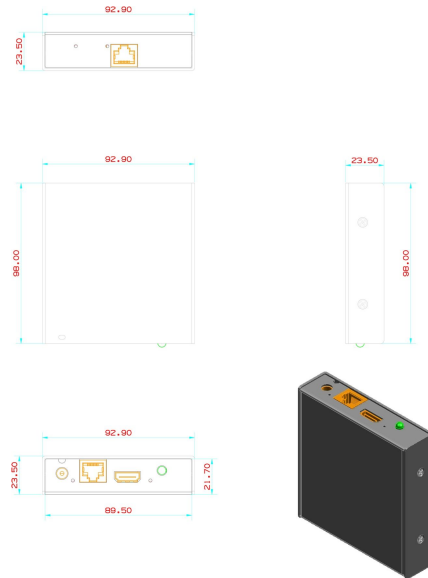


### Specification

Connectors	Input	1 × HDMI (Tx) 1 × HDBaseT (Rx)
	Output	1 × HDMI (Rx) 1 × HDBaseT (Tx)
	Power	5.4mm DC Socket
Performance	Input Resolution	HDMI (Tx): SMPTE: 625/25/50p PAL   525/29.97/59.94p NTSC   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 VESA: 800×600@60   1024×768@60   1280×768@60   1280×1024@60   1600×1200@60   1920×1080@60   1920×1080@50
	Output Resolution	HDMI (Rx): SMPTE: 625/25/50p PAL   525/29.97/59.94p NTSC   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 1280×720@23.98   1280×720@24   1280×720@25   1280×720@29.97   1280×720@30   1920×1080@23.98   1920×1080@24   1920×1080@25   1920×1080@29.97   1920×1080@30 VESA: 800×600@60   1024×768@60   1024×768@75   1024×768@85   1280×720@60   1280×768@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1400×1050@60   1440×900@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×816@60
	Supported Standards	HDBaseT: 1.0 HDMI: 1.3
Power	Input Voltage	12V DC (via universal Plug Pack)
	Max Power	1.5A
Environment	Temperature	0°C~45°C
	Humidity	10%~85%
Physical	Weight	0.18kg (Net Weight) 0.69kg (Package Weight)
	Dimensions	98mm x 92.9mm x 23.5mm (Device Dimension)
		170mm x 120mm x 80mm (Package Dimension)

### Order Codes

Product Code	Item
610-0215-01-1	MSP 215 - HDBaseT HDMI to Cat5e/6 Extender Set (max 100m)

### Application

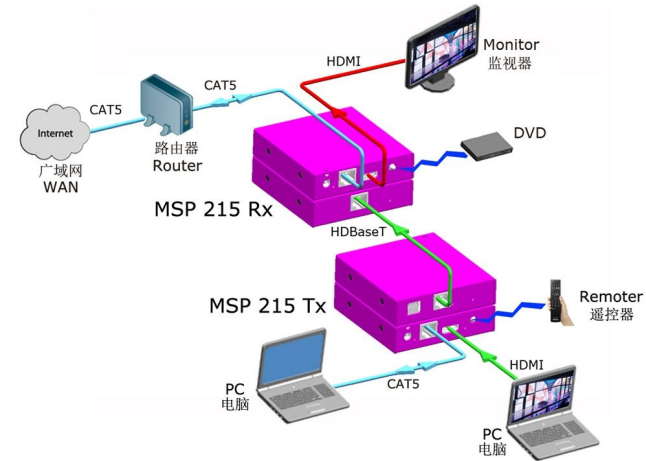

Tel: +86-592-5771197 Fax: +86-592-5788216  
 E-mail: sales@rgblink.com http://www.rgblink.com  
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial  
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.