


X14




Key Features

- Support for HDR pass through
- 165 mega pixels splicing output
- Display up to 160 layers, 4 layers each output
- Simultaneous & multiple operation modes
- Multi-display system integrated management
- Pre-installed Linux system
- 2K output 3Gbps, 4K output 12Gbps
- Redundant hot swap power supply option and auto temperature control
- Streaming source preview on XPOSE or 3rd party via H.264
- EDID management
- Genlock Y In / Loop
- Powerful format conversion among H.264,HDBaseT,SDI(SD-12G), HDMI(1.3,1.4,2.0),DVI,DP(1.1,1.1a,1.2)
- 2SI and SQD switchable in 4K application

Application

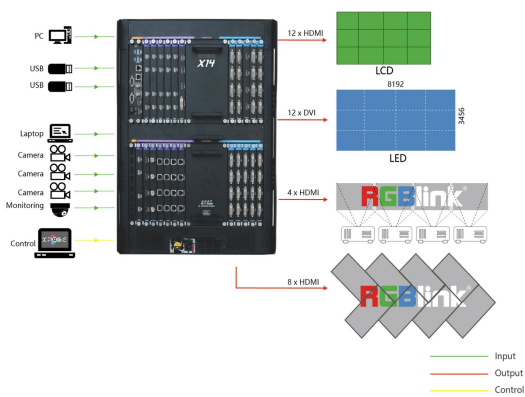

Dimensions

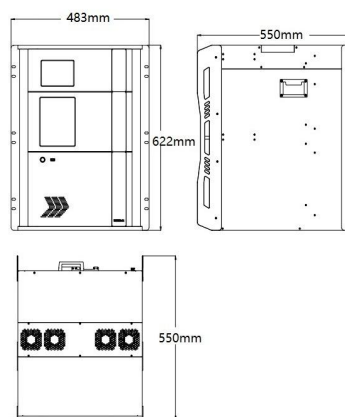

Order Codes

Product Code	Item
310-0014-01-0	X14
190-0014-02-0	Quad 2K D-HDMI Input Module
190-0014-03-0	Quad 3G D-SDI Input Module
190-0014-04-0	4K@60 Input Module (Choose one of four signals)
190-0014-05-0	12G SDI Input Module (single 12G-SDI, dual 6G-SDI, quad 3G-SDI)
190-0014-07-0	Quad H.264 Input Module
190-0014-10-0	4K HDMI 2.0 HDR Input Module
190-0014-21-0	Quad DVI Output Module

Product Code	Item
190-0014-22-0	Quad 2K HDMI Output Module
190-0014-23-0	Quad 3G SDI Output Module
190-0014-24-0	Quad HDBaseT Output Module
190-0014-25-0	H.264 Output Module
190-0014-26-0	Dual 4K HDMI 2.0 Output Module
190-0014-27-0	ARO Rotation Module (independent and arbitrary rotation for DVI)
190-0014-28-0	Dual HDMI 4K Multi-Layer Output Module
950-0006-00-0	Power Supply 1200W

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinxin Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com



Specification

Connectors	Input	13 slots, up to 52 2K inputs / 13 4K inputs, select from below			
		4K@60 Module	1 x DVI-I 2 x HDMI-A 1 x DisplayPort	HDMI Module 4 x HDMI-A	
		12G SDI Module	4 x BNC (1x 12G SDI or 4 x 3G SDI)	H.264 Module 4 x RJ45	
		3G SDI Module	8 x BNC (4 In 4 Loop)		
	Output	10 slots, up to 40 2K outputs/20 4K outputs, select from below			
		4K HDMI Module	2 x HDMI-A		
		2K HDMI Module	4 x HDMI-A	HDBaseT Module 4 x RJ 45	
		3G SDI Module	4 x BNC	H.264 Module 4 x RJ 45 2 x HDMI-A	
		DVI Module	4 x DVI-I	Rotation Module 4 x DVI-I	
	Communication	UART 2 x DB9			
		IP Config/Central Control 2 x RJ45			
		USB 4 x USB-A			
		Genlock In/Loop 2 x BNC			
	Power	2 slots, up to 2 power inputs 1 x IEC (Each Power)			
Performance	Input Resolutions	SDI	SMPTE 480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30		
		H.264	176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080		
		DVI	SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 2160p@30		
		VESA	800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x960@60 3840 x 2160@30		
		HDMI DisplayPort	SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@50/59.94/60 2160p@30/60		
		VESA	800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1080@60 2048x1152@60 2560x812@60 2560x960@60 2560x1600@60 3840x1080@60 3840x2160@30 3840x2160@60		
	Output Resolutions	Select from below or configure customized			
		SDI	SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30		
		DVI	SMPTE 720p@50/59.94/60 1080p@50/59.94/60		
		VESA	800x600@60 1024x768@60/75/85 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60/75/85 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60		
HDBaseT		SMPTE 720p@50/59.94/60 1080i@50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60			
VESA		1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60			
Supported Standard	HDMI	2.0	DVI	Dual Link	
	SDI	SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1,	HDBaseT	1.0	
		SMPTE ST 259, DVB-ASI, MADI			
	DP	1.2			
	Grey Level	12 Bit			
Features	Splicing	80K1K			
	Max Numbers of Layers	160			
	EDID Management	Yes			
	Remote Control	XPOSE (Windows/MacOS) OpenAPI T Series Consoles			
Power	Input Voltage	100V-240V 50/60-Hz auto adjusted			
	Max Power	1200W			
Environment	Temperature	0°C ~40°C			
	Humidity	10%~85%			
Physical	Weight	Net	50kg		
		Packaged	70kg		
	Dimensions	Net	483mmx550mmx622mm		
		Packaged	842mmx700mmx565mm		

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Bانشang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com

