

# MSP 200PRO

## PROAV Singal Monitor&Generator




### Key Features

- Touch Screen control
- Output a range of signal types
- Set and select from a range of common output formats
- Audio Output test included
- Genlock Y & HS outputs
- Input live signals for preview and inspection
- On Board Test Pattern Generator
- On board Time Code Generator
- Genlock Y Input
- Preview digital input source on the display
- Output (pass through) digital input source for signal testing


### Specification

<b>Connectors</b>	Input	<i>Standard</i>	<i>Optional</i>			
		HDMI	1×HDMI-A	1×BNC		
		Genlock	1×BNC			
	Output	SDI	1×BNC	Genlock Y VS/HS	2×BNC	
	DVI	1×DVI-I	Audio	1×3.5mm Stereo Jack		
CVBS	1×BNC					
Communication	USB	1×USB-B				
Power		1×DC Jack				
<b>Performance</b>	Input Resolutions	HDMI	SMPTE 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60			
		VESA	800×600@60   1024×768@60   1280×768@60   1280×1024@60   1600×1200@60   1920×1080@60			
		SDI	SMPTE 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60			
Output Resolutions	SMPTE	480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60				
	VESA	640×480@60/75/85   800×600@60/75/85   1024×768@60/75/85   1280×800@60   1280×1024@60/75/85   1360×768@60   1366×768@60   1440×1050@60   1680×1050@60   1920×1080@60				
Supported Standard	HDMI	1.3	DVI	Single Link	USB	2.0
	USB	SMPTE 425M (Level A & B)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI				
<b>Power</b>	External	Input Voltage	DC12V (Via Plug Pack)			
		Max Power	12W			
Battery (Optional)	Type	Lithium Ion	Quantity	2PCS		
	Cell	18650	Voltage	3.7V		
	Capacity	1500Mah	Recharge Time	1hr		
	Size	65mm (length) ×18mm (dia)				
<b>Environment</b>	Working Temperature	-0 ~45℃				
	Humidity	10 - 85%				
<b>Physical</b>	Weight	Net (Device) 0.83kg				
	Dimensions	Net (Device) 219mm×148.5mm×32mm				

### Application

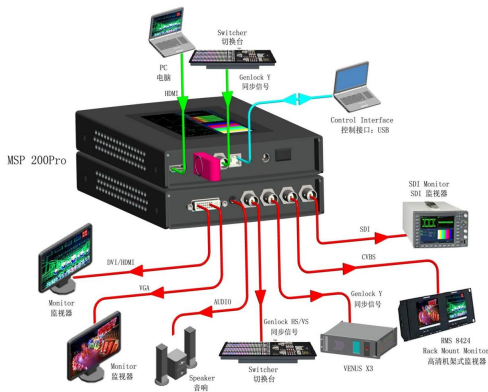

### Dimension

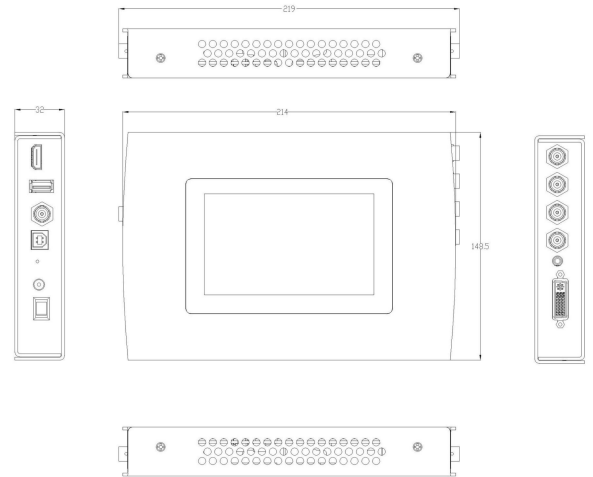

### Order Codes

Product Code	Item
650-0200-01-0	MSP 200PRO
490-5353-01-0	SDI Input Module-MSP 200PRO

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com  
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

