MSP 404
HDMI 4K to 12G SDI Convertor

Key Features

- Support single link 12G SDI and quad link 3G SDI
- Compliant with HDMI 2.0b, output without HDCP
- Resolution up to 4K2K@60Hz YCbCr 4:2:2
- PCM 2.0 Audio
- Transmission distance(in/out): 3G SDI up to 100m, 12G SDI up to 60m
- External audio embeded and input
- Work mode switched by dip
- Plug and play

Speficification

Connectors	Input	HDMI	1×HDMI-A	
		Audio	1×3.5mm Jack	
	Output	SDI	4×BNC	1×12G SDI (SDI 1) or 4×3G SDI (SDI 1-4)
Performance	Input Resolution	HDMI	SMPTE	480i@60 I 576i I 720P@50/59.94/60 I 1080i@50/59.94/60 I 1080P@23.98/24/25/29.97/30/50/59.94/60 2160P@23.98/24/25/29.97/30/50/59.94/60
	Output Resolution	SDI	SMPTE	480i@60 I 576i I 720P@50/59.94/60 I 1080i@50/59.94/60 I 1080P@23.98/24/25/29.97/30/50/59.94/60 2160P@23.98/24/25/29.97/30/50/59.94/60
	Supported Standard	SDI	SMPTE ST-2082,SMPTE ST-2081,SMPTE 425M-AB,SMPTE 424M, SMPTE 292M, SMPTE 259M-C	
		HDMI	2.0b	
Power	Input Voltage	12V DC/1A		
	Power consumption	10.8W		
Environment	Temperature	0°C ~ 40°C / 32°F ~ 104°I		
	Humidity	20~90% RH, RH		
Physical	Weight	0.4kg		
	Dimension	120mm ×112.4mm× 22mm		

Application

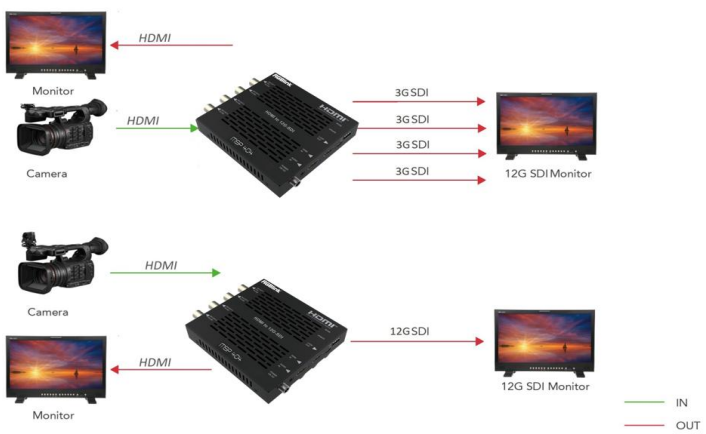

Dimension

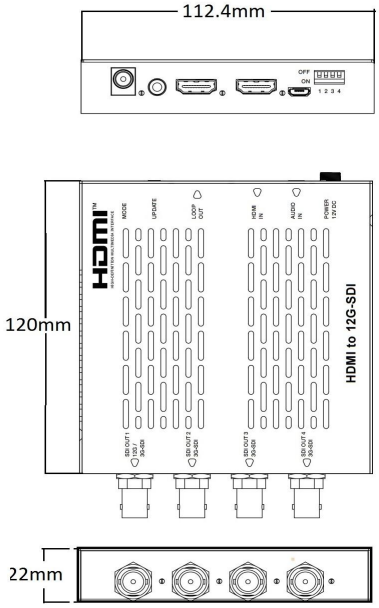

Order Codes

Product Code	Item
610-0404-01-0	MSP 404

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza,Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink
www.rgblink.com