

MSP 316H

1x2 HDMI Distributor



Key Features

- Support HDR signal pass through
- HDMI 2.0b, HDCP 2.2 compliant
- Up to 4K2K@60Hz with 24bit RGB/YCbCr 4:4:4
- VESA format up to QSXGA@60Hz
- Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
- Built-in equalizer, retiming and driver
- Smart EDID Switching, Left STD mode and Right TV mode
- Compact design for an easy and flexible installation


Specification

Connectors	Input	HDMI	1xHDMI-A
	Output	HDMI	2xHDMI-A
Performance	Input Resolutions	SMPTE	480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@24/30/50/60
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1600@60 3840×1080@60 3840×2160@24/30/50/60 4096×2160@24/30/50/60
	Output Resolutions	SMPTE	480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@24/30/50/60
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1600@60 3840×1080@60 3840×2160@24/30/50/60 4096×2160@24/30/50/60
Power	Input Voltage	DC 12V/1.5A	
	Power Consumption	≤2W	
Environment	Working Temperature	0 - 40°C	
	Storage Temperature	-20 - 60°C	
	Humidity	20 - 90%	
Physical	Weight	Net	0.17 kg
		Packaged	0.3 kg
	Dimensions	Net	102mm×58mm×23mm
Packaged		160mm×120mm×80mm	

Application



Dimension

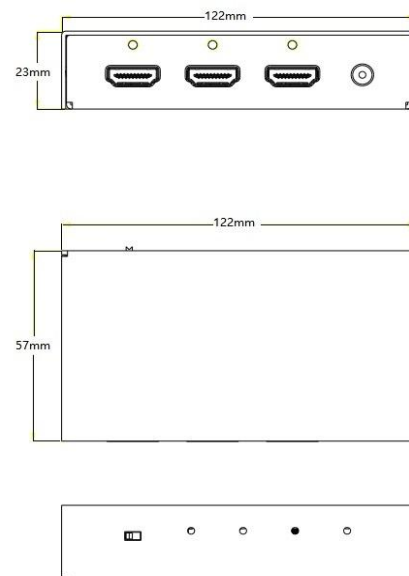

Order Codes

Product Code	Item
621-0316-01-0	MSP 316H

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.