





Key Features

- 4K HDMI Inputs
- Embedded & Insert Audio with Sync
- Mix audio from multiple inputs
- USB Streaming Output
- Joystick Camera Control
- Assignable Preview Multi-View
- Built-in LCD for video previews
- Chroma Key
- Configurable PIP video overlay
- Broadcast style TBAR

Application

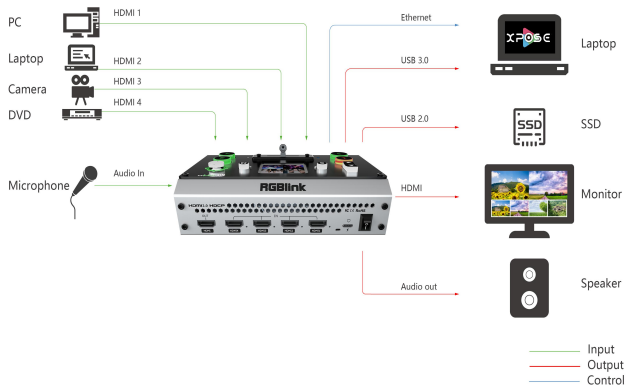

Dimensions

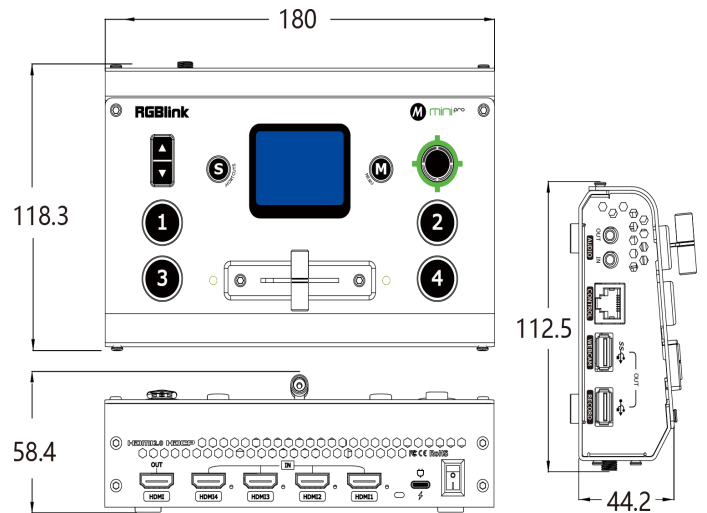

Order Codes

Product Code	Item
230-0003-01-0	mini-pro

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgblink.com



Specification

Connectors	Input	HDMI 4K	4×HDMI-A	
	Output	HDMI 2K	1×HDMI-A	
		Streaming	1×USB TypeA	
		Recording	1×USB TypeA	
	Audio	In	1×3.5mm Stereo Jack	
		Out	1×3.5mm Stereo Jack	
Communication	LAN	1×RJ45		
Power		1×USB-C		
Performance	Input Resolutions	HDMI		
		SMPTE	720p@50/60 1080i@50 1080p@24/30/50/60 2160p@60	
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 3840×2160@60 4096×2160@60	
	Output Resolutions	HDMI		
		SMPTE	720p@50/60 1080p@24/25/30/50/60	
		VESA	1024×768@60 1280×720@50/60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@24/25/30/50/60	
		USB	1024×768@60 1280×720@50/60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@24/25/30/50/60	
	Supported Standards	HDMI	2.0	
		USB	3.0	
		H.265	ITU-T H.265/ ISO/IEC 23008-2	
	Supported Protocol	PTZ	VISCA	
	Video Formats	HDMI 2.0 HDCP 2.2		
	Streaming Formats	ITU-T H.265 ISO/IEC 23008-2		
	Disk Formats	FAT32(≤32 GB) exFAT(64GB~2T)		
Recording Formats	MP4 WAV			
Color Space	RGB			
Video Sampling	4:4:4 YUV			
Latency	<4 frames			
Line In Delay	up to 8 frames			
Power	Input Voltage	DC 12V/1.5A (via plug pack supplied)		
	Max Power	24W		
	Compatability	USB Power Delivery (PD) 3.0		
	Supported Cables	Certified USB PD Aware		
Environment	Temperature	0°C~60°C		
	Humidity	10%~85%		
Physical	Weight	Net	0.5kg	
		Package	1.25kg(1pcs)	
			10kg(10pcs)	22.55kg(20pcs)
	Dimension	Net	180mm×118.3mm×58.4mm	
Package		255mm×145mm×85mm(1pcs)	490mm×305mm×345mm(10pcs)	565mm×490mm×345mm(20pcs)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgblink.com

