






## mini-edge-lite

### All-In-One Portable Case


This Dedicated Portable Case made of high-strength PE material is equipped with a 14-inch TFT display and a switcher. Integrated audio and video switching, PTZ camera control, multi-view monitoring, and recording in one case, this portable and shock-resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.



## Key Features

- 14" HD TFT screen and 5.5" LCD screen for monitoring
- High strength PE flightcase features long-lasting durability
- Powerful air-cooling system designed for outdoor use
- Four HDMI 2.0 inputs (HDCP compliance), resolutions up to 4K@60
- One USB (UVC) input supports camera source from RGBlink vue PTZ and webCAM
- Eight audio inputs with Four HDMI 2.0 embedded audio inputs and Four external audio inputs (one MIC, one LINE, one Bluetooth and one Type-C digital audio)
- Eight audio inputs allow for output of mixed audio across one or all available channels
- Dual HDMI 1.3 outputs for monitoring of multi-window PVW, PGM or AUX
- Dual audio out jacks for listening
- One-key recording. Recording capacity of hard drive is up to 2TB
- Support simultaneous streaming to 4 live streaming platforms via RTMP(S)
- Support multi-layer overlay, layer scaling and cropping
- 17 switching effect modes
- 5-direction joystick for controlling up to 4 PTZ cameras
- Support saving up to 10 scene presets and thumbnails for real-time full preview
- Web control and monitoring, compatible with mobile devices and computers, compatible with multiple operating systems
- Support Chroma Key
- 5G/4G Smartphone Tethering for iOS and Android system

## Application

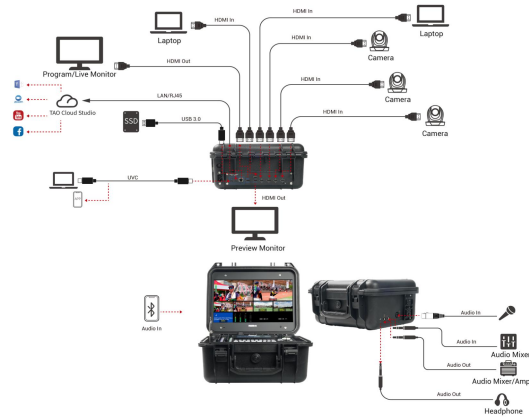

## Specification

|                     |                    |   |   |  |
|---------------------|--------------------|---|---|--|
| <b>Connectors</b>   | Input              | HDMI 4K<br>UVC (Webcam)                 | 4×HDMI-A<br>1×USB-C   |  |
|                     | Output             | HDMI 2K<br>USB (record)<br>USB (stream) | 2×HDMI-A<br>1×USB-C<br>1×USB-C  |  |
|                     | Audio              | MIC IN<br>LINE IN<br>OUT                | 1×6.35mm XLR + TS Jack (48V Phantom Power)<br>1×6.35mm TRS Jack<br>1×6.35mm TRS Jack<br>1×3.5mm mini-Jack |  |
|                     | Communication      | LAN                                     | 1×RJ45  |  |
|                     | Power              | Power Supply                            | 1×Power Jack<br>1×Power Switch  |  |
|                     | <b>Performance</b> | Input Resolution                        | HDMI  | 1280×720@50/59.94/60   1024×768@60   1280×768@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1440×900@60   1600×1200@60   1680×1050@60   1920×1200@60   1920×1080i@50/59.94/60   1920×1080p@23.98/24/25/29.97/30/50/59.94/60   3840×2160p@30/50/60   4096×2160@30/50/60 |
| Output Resolution   |                    | HDMI<br>USB (Webcam)                    | 1280×720@50/60   1920×1080@60   3840×1080@30<br>1920×1080@24/25/30/50/60                                  |  |
| Video               |                    | Video Formats                           | HDMI 2.0   HDCP 2.2   |  |
|                     |                    | Grayscale Processing                    | 10bit   |  |
|                     |                    | Video Sampling                          | 4:4:4 YUV   |  |
|                     |                    | Video Latency                           | <4 frames   |  |
| Audio               |                    | Line In Delay                           | up to 8 frames  |  |
|                     |                    | Audio Format                            | HDMI  | Linear PCM, 24 bits/48 kHz, 2 ch   |
| Record/Storage      |                    | Record Formats                          | MP4   |  |
|                     |                    | Disk Formats                            | FAT32(≤32 GB)   exFAT(64GB~2T)  |  |
| Supported Standards | HDMI               | 2.0                                     |   |  |
|                     | USB                | 3.0                                     |   |  |
|                     | H.265              | ITU-T H.265/ ISO/IEC 23008-2            |   |  |
| <b>Display</b>      | Screen Size        | 14"                                     |   |  |
|                     | Panel Type         | TFT                                     |   |  |
|                     | Border Size(L/R/U) | 4.82 / 6.72 / 4.42                      |   |  |
|                     | Resolution         | 1920×1080 pixels                        |   |  |
|                     | Contrast Ratio     | Typ:500/Min:350                         |   |  |
|                     | Gamut              | 45%                                     |   |  |
|                     | Brightness         | 220 cd/m <sup>2</sup>                   |   |  |
| <b>Power</b>        | Input Voltage      | 110~240V                                |   |  |
|                     | Maximum Power      | 36W                                     |   |  |
| <b>Physical</b>     | Material           | PE                                      |   |  |
|                     | Color              | Black                                   |   |  |
|                     | Net Weight         | 4 kg                                    |   |  |
|                     | Packaged Weight    | 4.5 kg                                  |   |  |
|                     | Net Dimension      | 360mm × 308mm × 177mm                   |   |  |
|                     | Packaged Dimension | 370mm × 318mm × 187mm                   |   |  |

## Order Codes

| Order Codes   | Item           |
|---------------|----------------|
| 230-0006-09-0 | mini-edge-lite |

## Contact us

Tel: +86-592-5771197  
 Fax: +86-592-5788216  
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

**RGBlink**  
 www.rgblink.com

