

**PRELIMINARY**



**RGBlink®**



## mini-ISO

### 10-Channel All-in-One Switcher


mini-ISO features four 4K HDMI inputs and four SDI inputs, supporting signals from PC, Laptop, camera and more. Both Line and Mic level audio are supported. Dual HDMI outputs support for monitoring of multi-view Preview, Program or Test Pattern. One USB output supports YUY2 and MJPEG encoding formats, which can be recognized as webcam for streaming to Facebook, YouTube, ZOOM, etc.

mini-ISO is built with 3.5-inch TFT touch screen for menu operation and video sources display. mini-ISO is packed with features including dynamic output control, multi-view preview, picture in picture, chroma Key, luma Key, transitions, on board PTZ camera controls and much more.

mini-ISO is compatible with Windows and macOS desktop operating systems and supports control via iOS and Android mobile devices. It supports TAO Cloud integrated control and simultaneous streaming to 4 live streaming platforms via RTMP(S).




Education



Sports



Worship



Events




Conference


## Key Features

- mini and is convenient to carry
- 3.5-inch TFT touch screen for menu operation, signal preview and working status display
- Quad HDMI 2.0 inputs (HDCP 1.4 compliance), resolution up to 4K@60
- Quad SDI inputs supports signal from PC, camera, etc
- Dual HDMI 1.3 outputs for monitoring of multi-view Preview, Program or Test Pattern
- Mix for 4-channel HDMI/SDI embedded and 2-channel external audio
- AUTO and WIPE Switch mode available
- 15 transition effects
- USB 2.0 one-key recording in exFAT or FAT32 format with bitrate up to 16Mbps
- USB output supports YUY2 or MJPEG format, which can be recognized as webcam for streaming
- Support RTMP(S) network streaming up to 4 platforms
- Save and load PTZ presets. One-click for preset recall
- 5-direction joystick and toggle for controlling PTZ camera (IP VISCA Protocol supported)
- Specify either "green" or "blue" as the key color for Chroma Key
- Support Luma Key
- Support TAO Cloud control, compatible with mobile devices and desktop

## Application

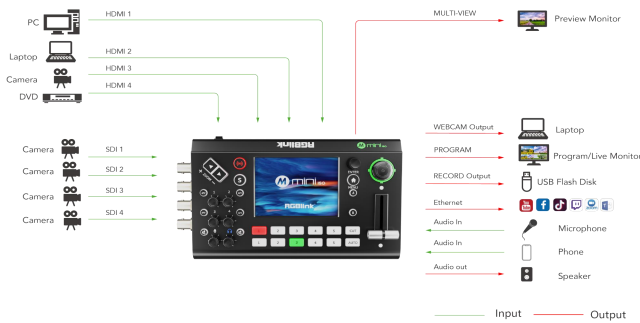

## Dimension

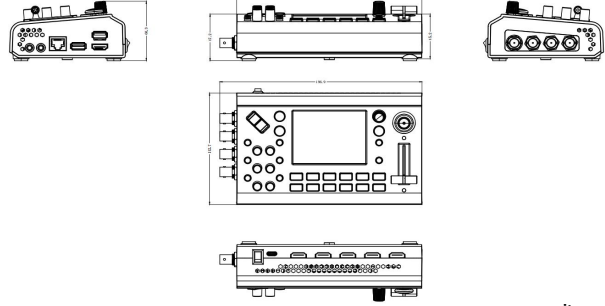

unit: mm

## Specification

mini series    mini-ISO

<b>Connectors</b>	Input	HDMI 4K	4xHDMI-A
		UVC (webcam)	1xUSB-A
		SDI	4xBNC
		Media	1xUSB-A
	Output	HDMI 2K	2xHDMI-A
	USB (Record)	1xUSB-A	
	USB (Stream)	1xUSB-A	
	RTMP(S)/NDI	1xRJ45	
Audio	Embedded Audio Input	4xHDMI-A	
	External Digital Input	1xUSB-A	
	External Analog Input	2x3.5mm mini-Jack	
	External Analog Output	1x3.5mm mini-Jack	
Communication/Stream/Upgrade	LAN	1xRJ45	
Power	Power Supply	1xUSB-C	
<b>Performance</b>	Input Resolutions	HDMI 2.0	
		SMPTTE	720p@50/60   1080i@50/60   1080p@24/30/50/60
		VESA	1024x768p@60   1280x720p@60   1280x768p@60   1280x800p@60   1280x1024p@60   1360x768p@60   1366x768p@60   1440x900p@60   1600x1200p@60   1680x1050p@60   1920x1080p@60   1920x1200p@60   3840x2160p@60   4096x2160p@60
		SDI	720p@50/60   1080i@50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60
	Output Resolutions	HDMI 1.3	1280x720p@50/60   1920x1080p@23.98/24/25/29.97/30/50/59.94/60
		USB	1280x720p@60   1920x1080p@24/25/30/50/60
	Video	Color Space	RGB 8bit   YCbCr 4:4:4 8bit   YCbCr 4:2:2 8bit
		Video Latency	<3 frames
	Audio	Audio Format	PCM/2ch/24bit/48kHz
		Sampling Rate	48k
	Bitrate	24bit	
Record/Storage	Record Formats	MP4 (up to 16Mbps)	
	Disk Formats	FAT32   exFAT	
Supported Standards	HDMI	2.0	
	HDCP	2.2	
	USB	3.0	
	SDI	3G/HD/SD	
	NDI	NDI   HX2	
<b>Power</b>	Compatibility	USB Power Delivery (PD) 3.0	
	Supported Cables	Certified USB PD Aware	
	Input Voltage	12V/2.5A	
	Maximum Power	30W	
<b>Environment</b>	Temperature	0°C~60°C	
	Humidity	10%~85%	
<b>Physical</b>	Net Weight	0.60kg	
	Packaged Weight	1.38kg	
	Net Dimension	197mm × 113mm × 60mm	
	Packaged Dimension	255mm × 145mm × 85mm	

## Order Codes

Order Codes	Item
230-0007-01-0	mini-ISO

## Contact us

Tel: +86-592-5771197  
 Fax: +86-592-5788216  
 E-mail: sales@rgbink.com  
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,  
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China



www.rgbink.com