

Preliminary

RGBlink®



YUNBAO

Your First All-in-One 4K IoT treasure box

Introducing YUNBAO—the first All-In-One Solution for 4K Network Capture, Storage, and Collaboration. Built on a robust hardware platform, YUNBAO empowers UHD content creation, seamless data storage, and cloud-based collaboration like never before. Bridging content from its inception or centralizing assets scattered across locations has never been so simple and accessible. YUNBAO opens the door for anyone, anywhere, to become a content creator, every day.

But YUNBAO is far more than just a private graphic and video data bank. It's an advanced integration of edge hardware and cloud computing, forming a hybrid ecosystem that optimizes computational efficiency, minimizes latency, and scales effortlessly. YUNBAO focuses on preprocessing as a core function, capturing raw data, performing real-time synchronization, initial filtering, and aggregation, while ensuring only the most relevant insights are transmitted to the cloud or prepared for AI-driven processing.

This powerful combination of edge intelligence and cloud scalability redefines the content creation landscape. By uniting local performance with global adaptability, YUNBAO delivers faster, smarter, and more efficient solutions, setting a new benchmark for the industry. Whether you're a seasoned professional or a budding creator, YUNBAO is the ultimate tool to



H.265/H.264/
NDI encoder



4K@60Hz Input



HTTP/ SRT/ RTMP/
RTSP/NDI



TAO Cloud



PoE




Portable

Key Features


- Mini and convenient to carry
- H.265/H.264 high-performance encoding capability
- Input resolution up to 4K@60Hz
- HTTP/SRT/RTMP(s)/RTSP/NDI protocols supported

- Feature with one USB interface for recording
- PoE & DC 12V power supply
- TAO Cloud integrated control
- Low latency transmission

Application

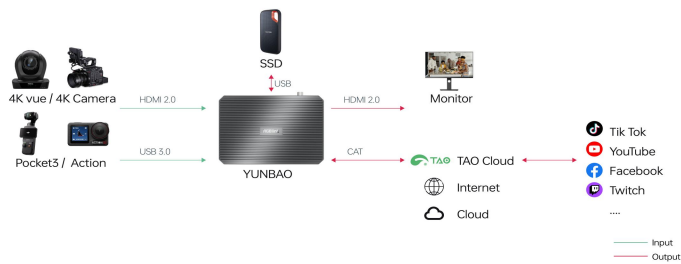

Dimensions

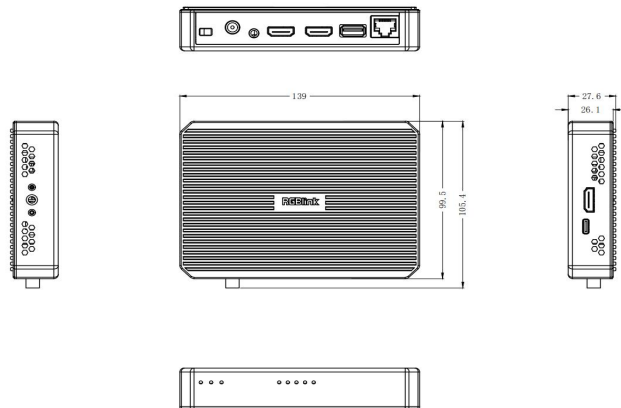

unit: mm

Specification

Interface	Input	HDMI 2.0	1 × HDMI-A
		UVC	1xtype-C
	Output	HDMI 2.0	1 × HDMI-A (LOOP)
		HDMI 2.0	1 × HDMI-A
	Audio	Line-in	1 × 3.5mm Audio Jack
	Ethernet/Upgrade/Stream	LAN	1 × RJ45
	Storage	USB	1 × USB-A
Power	Power	1 × DC Jack	
Performance	Input Resolution	HDMI 2.0	3840 × 2160@30/50/60 720p@50 1920 × 1080p@24/30/50/60
		Format	RGB/YUV 4:4:4/YUV 4:2:2 8bits/10bits/12bits
		Deinterlacing	YES
		Embedded Audio	YES
		HDCP	2.2/1.X
	Output Resolution	HDMI 2.0/UVC	3840 × 2160@30/50/60 720p@50 1920 × 1080p@24/30/50/60
	Audio Input	Audio Mixing	YES
		Analog Audio Input	LINE IN
	Record	Video	H.264, up to 32Mbps
		Audio	AAC, up to 48Kbps
Storage	Built-in Storage	128GB	
Encoding	Performance	H.264/H.265	
	Protocols	HTTP/SRT/RTMP/RTSP/NDI	
	Resolution	up to 3840 × 2160p@60	
Power	DC Input	12V/2A	
Working Environment	Temperature	0℃~55℃	
	Humidity	5%~85%	
Physical	Net Dimension	165mm × 106.4mm × 28mm	

Order Codes

Product Code	Item
601-0325-05-1	YUNBAO

Contact us

Tel: +86-592-5771197

Fax: +86-592-5788216

E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

RGBlink

www.rgblink.com

