

# Preliminary



# RGBlink®



## mini-ultra

### Elevating Content Creation to 4K Excellence

Building on the legacy of the mini series, the mini-ultra marks a leap from FHD to UHD, empowering content creators to effortlessly transition into 4K production and elevate their work to new heights.


The mini-ultra's 4K journey begins with versatile input options, including 2 x HDMI 2.0 inputs, 1 x 4K NDI|HX3 input, 1 x 4K UVC or media input. Seamless content integration is achieved via USB drives or the TAO cloud, offering access to graphics and media assets. Creators can design and customize two live canvas windows, blending media and backgrounds into presets that can be seamlessly switched to Program Outputs.

The output capabilities are equally robust, featuring 2 x HDMI 2.0, 1 x NDI, RTMP(s) for live streaming, 1 x USB 3.X for capture, and 1 x USB 3.0 for recording. For audio, the mini-ultra offers advanced onboard management with support for 4 digital embedded audio channels and 1 analog input. It includes a professional-grade equalizer, echo effects, fusion processing, and mixing tools for precise sound control. Outputs can be customized with features like AFV (Audio Follow Video) or mute.


The mini-ultra also excels in PTZ camera remote control, particularly with 4K UHD PTZ cameras. Whether capturing content via HDMI 2.0 or 4K NDI, the mini-ultra delivers unparalleled flexibility and performance for content creators looking to push their craft to the next level.




Education



Sports



Worship



Events




Conference


## Key Features

- Mini and convenient to carry
- 4-inch TFT touch screen for icon menu control, preview, and working status display
- USB 3.0 4K recording capability, maximum recording bitrate is 16 Mbps
- 2-CH HDMI 2.0 input, maximum resolution 4K@60, HDCP 2.0 support
- 1-CH 4K NDI / HX3 input and output
- USB 3.0 recording which is USB and UAC devices compatible (for example, AI mini wireless microphone)
- Materials imported via U disk and API protocol can be used as independent background layers
- USB 3. X supports RGB24 / YUY2 / NV12 / I420 / P010 / MJPEG formats, which can be recognized as a camera for live streaming by computers or mobile phones
- Support 4K streaming via RTMP(s) and 4K NDI|HX3
- 1-CH HDMI 2.0 main output and 1-CH HDMI 1.3 for preview
- 2-CH HDMI and NDI support embedded audio and 1-CH external audio mixing
- Independent control of PTZ, zoom, and focus of multiple PTZ cameras; fast view saving and view recall
- Overlay of logo
- Chroma key support, green and blue real-time keying support
- T-bar supports seamless transition between background, 2-CH HDMI 2.0, 1-CH NDI, 1-CH UVC, 2-CH video signals, and multiple background layers; up to 15 transition effects
- Luma key support
- Cut mode and preview transition mode support
- TAO cloud control, compatible with mobile phones and computers

## Application

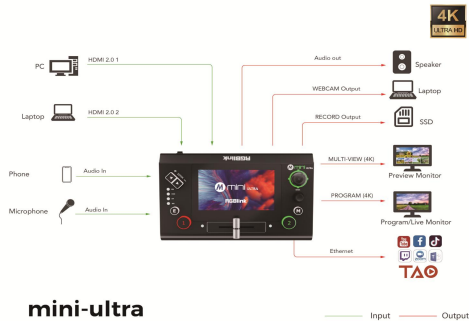

## Dimension

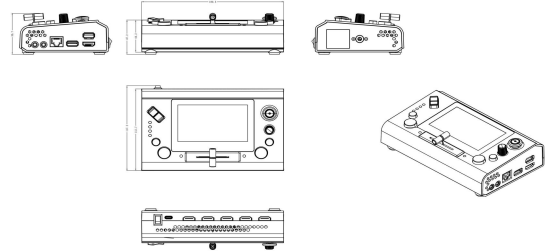

unit: mm

## Specification

mini series    mini-ultra

Connectors	Video Input	HDMI 4K/LOOP UVC (USB Cam) Media 4K NDI HX3	4 × HDMI-A 1 × USB-A (Record) 1 × USB-A (Record) 1 × RJ45	
	Video Output	HDMI 2K HDMI 4K USB 4K (Record) USB 4K (Stream) RTMP(s)/NDI	1 × HDMI-A 1 × HDMI-A 1 × USB-A (Record) 1 × USB-A (Webcam) 1 × RJ45 (LAN)	
	Audio Input	Embedded Audio Input External Digital Input External Analog Input	4 × HDMI-A 1 × USB-A 2 × 3.5mm mini-Jack	
	Audio Output	External Analog Output	1 × 3.5mm mini-Jack	
	Communication/Stream/Upgrade	LAN	1 × RJ45	
	Power	Power Supply	1 × USB-C	
	Performance	Input Resolutions	HDMI 2.0 SMPT VESA UVC	1280 × 720p@50/59.94/60/100/119/88/120   1920 × 1080i@50/59.96/60   1920 × 1080p@23.98/24/25/30/50/60/100/120   3840 × 2160p@23.98/24/25/29/97/30/50/59.94/60   4096 × 2160p@23.98/24/25/29/97/30/50/59.94/60   1024 × 768p@60/75/85   1280 × 800p@60   1280 × 1024p@60/75/85   1366 × 768p@60   1366 × 768p@60   1440 × 900p@60   1600 × 1200p@60   1680 × 1050p@60   1680 × 1050p@60   1920 × 1080p@60   1920 × 1200p@60   3840 × 2160p@60   4096 × 2160p@60 4K support
Output Resolutions		HDMI 2.0 USB 4K support	1024 × 768@75/85   1280 × 800@60   1280 × 1024@60/75/85   1920 × 1080@23.98/24/25/29.97/30/50   3840 × 2160@24/25/30/50/60   4096 × 2160@30/50/60	
Video		Color Space Video Latency	Input: RGB 12bit   YcbCr 4:4:4 12bit   YcbCr 4:2:2 12bit Output: RGB 8bit <3 frames	
Audio		Audio Format Sampling Rate Bitrate	PCM/2ch/24bit/48kHz 48K 24bit	
Record/Storage		Record Formats Disk Formats	MP4 (up to 16Mbps) FAT32   exFAT	
Supported Standards		HDMI HDCP USB NDI	2.0 2.2 3.0 NDI   HX3	
Power		Compatibility	USB Power Delivery (PD) 3.0	
		Supported Cables	Certified USB PD Aware	
		Input Voltage	12V/3.3A	
		Maximum Power	40W	
Environment	Temperature	0°C ~ 60°C		
	Humidity	10% ~ 85%		
Physical	Net Weight	0.60kg		
	Packaged Weight	1.38kg		
	Net Dimension	180.5mm × 117.2mm × 47.2mm		

## Order Codes

Order Codes	Item
230-0010-01-0	mini-ultra

## Contact us

Tel: +86-592-5771197  
 Fax: +86-592-5788216  
 E-mail: sales@rgblink.com  
 Headquarter: 6th Floor, No. 37-3 Banshang community, Building 3,  
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China



www.rgblink.com

Specifications are correct at time of printing and subject to change or alteration without notice!