





mini-EFP-4S

All-In-One Portable Case for mini SDI series


This Dedicated Portable Case made of high-strength PP material is equipped with a 14-inch IPS display and a switcher with option of mini-ISO, mini-mx SDI or mini-edge SDI. Integrated audio and video switching, PTZ camera control, multi-view monitoring, and recording in one case, this portable and shock-resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.



Key Features

- 3 switcher options: mini-ISO, mini-mx SDI and mini-edge SDI
- Professional aviation connector to ensure high-quality performance
- Flexible standard connectors to meet personalized application
- Built-in 14" HD IPS monitor
- High strength PP flightcase features long-lasting durability
- hydraulic rod support to enhance the stability
- Powerful air-cooling system designed for outdoor use
- 4K multi-channel streaming video mixer
- 4*4K HDMI inputs and 4*3G SDI inputs
- 1*HDMI PROGRAM Output
- 2K streaming and live via IP and UVC
- Streaming supports NDI | HX2
- Streaming and management via RGBlink TAO Cloud
- Manual real-time control of PTZ cameras, such as zoom in/out, pan/tilt, and focus, via VISCA or NDI
- mini-ISO-4S built-in magnetic wireless charging module supports charging for mobile phones

Application

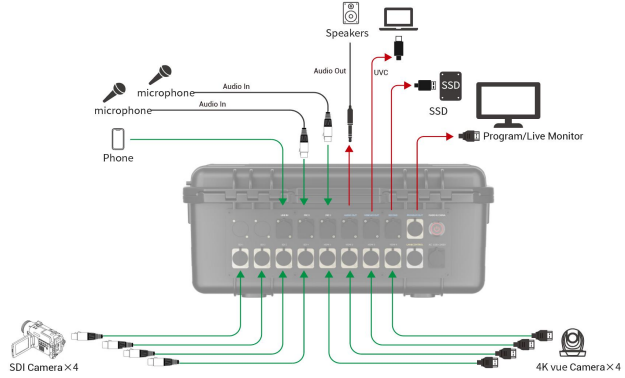

* wireless charging subject to mobile phones, not all mobile phones support wireless charging

Specification

Model	EEP	mini-ISO-4S	mini-mx-4S	mini-edge-4S	
	Built-in switcher	mini-ISO	mini-mx SDI	mini-edge SDI	
Connectors	Input	HDMI 4K SDI 3G Media UAC NDI	4 × HDMI-A 4 × BNC 1 × USB-A(Record) 1 × RJ45 (LAN)	4 × HDMI-A 4 × BNC 1 × USB-C (Record) 1 × RJ45 (LAN)	
	Output	HDMI 2K USB 2.0 (Record) UVC RTMP(S) NDI	1 × HDMI-A (PGM) 1 × USB-A (Record) 1 × USB-A (Webcam) 1 × RJ45 (LAN)	1 × HDMI-A (PGM) 1 × USB-C (Record) 1 × USB-C (Webcam) 1 × RJ45 (LAN)	
	Audio	MIC IN 1 MIC IN 2 LINE IN Audio OUT	1 × 6.35mm TRS jack / 1 × 6.35mm TRS jack 1 × 6.35mm TRS jack	1 × 6.35mm TRS jack 1 × 6.35mm TRS jack 1 × 6.35mm TRS jack 1 × 6.35mm TRS jack	1 × 6.35mm TRS jack / 1 × 6.35mm TRS jack 1 × 6.35mm TRS jack
	Communication	LAN	1 × RJ45	1 × RJ45	1 × RJ45
	Power		1 × IP65 AC jack USB-C	1 × IP65 AC jack	1 × IP65 AC jack
Performance	Input Resolution	HDMI SDI	1280 × 720@50/59.94/60 1024 × 768@60 1280 × 768@60 1280 × 800@60 1280 × 1024@60 1360 × 768@60 1366 × 768@60 1440 × 900@60 1600 × 1200@60 1680 × 1050@60 1920 × 1200@60 1920 × 1080i@50/59.94/60 1920 × 1080p@23.98/24/25/29.97/30/50/59.94/60 3840 × 2160p@30/50/60 4096x2160@30/50/60	1280 × 720@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60	1280 × 720@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
	Output Resolution	HDMI/USB (Webcam)	1280 × 720@50/60 1920 × 1080@24/25/30/50/60	1280 × 720@50/60 1920 × 1080@24/25/30/50/60	
	Video	Color Space(HDMI SDI) Video Sampling Bit depth Video Latency	RGB YUV 4:4:4 4:2:2 8bit 10bit <3 frames	RGB YUV 4:4:4 4:2:2 8bit 10bit <4 frames	RGB YUV 4:4:4 4:2:2 8bit 10bit <4 frames
	Audio	Audio Format (HDMI USB)	PCM/2ch/24bit/48kHz /	Linear PCM, 24 bits/48 kHz, 2 ch Linear PCM, 16 bits/48 kHz, 2 ch	Linear PCM, 24 bits/48 kHz, 2 ch Linear PCM, 16 bits/48 kHz, 2 ch
	Record/Storage	Record Formats Disk Formats	MP4 FAT32(≤32 GB) exFAT(64GB~2T)		
	Supported Standards	HDMI USB H.265 SDI	2.0 3.0 ITU-T H.265/ ISO/IEC 23008-2 SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI		
Display	Screen Size	14"			
	Panel Type	TFT			
	Border Size(L/R/U)	4.82 / 6.72 / 4.42			
	Resolution	1920×1080 pixels			
	Contrast Ratio	Typ:500/Min:350			
	Gamut	45%			
Brightness	220 cd/m ²				
View Angle (U/D/R/L)	24° / 45° / 45° / 45°				
Power	Input Voltage	AC 100~240V PD 12V	AC 100~240V	AC 100~240V	
	Maximum Power	30W	40W	40W	
	Output	15W wireless charge	/	/	
Physical	Material	PP			
	Color	Black			
	Net Weight	TBD			
	Packaged Weight	TBD			
	Net Dimension	360mm × 308mm × 177mm			
	Packaged Dimension	370mm × 318mm × 187mm			

Order Codes

Order Codes	Item
230-0007-03-0	mini-ISO-4S
230-0008-02-0	mini-edge-4S
230-0009-02-0	mini-mx-4S

Contact us

Tel : +86-592-5771197

Fax : +86-592-5788216

E-mail : sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

RGBlink
www.rgbink.com

