


## STEP 1 : Connect receiver


1. Connect **USB-C port on RX** to a USB port on the display or other USB power source(not included).
2. Plug HDMI on RX to the HDMI IN of TV or projector.

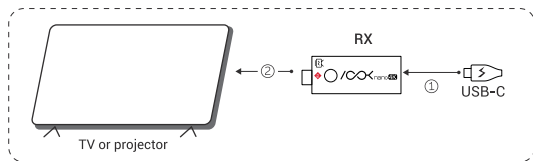

## STEP 2 : Start casting

### Project or Extend Laptop Display with TX

1. Plug USB-C male on TX to Laptop.
2. Wait and it will connect automatically.

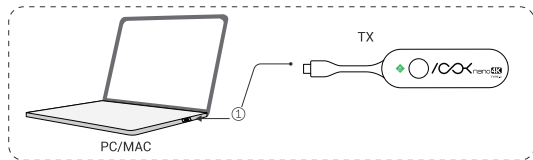

## In the Box

ASK nano 4K USB-C Transmitter	1
ASK nano 4K Receiver	1
USB-C Cable	1
HDMI male to female extender	1

## Specification

Transmitter	
USB-C	DisplayPort 1.3
Supported Input Resolution	720×480@50/60   720×576@50/60   1280×720@50/60   1920×1080@24/25/30/50/60 3840×2160@30
Receiver	
Power	USB-C 5V DC/1A Max 3.0W
HDMI	HDMI 2.0
Output Resolution	3840×2160@60

## Trouble Shooting

**Q:** What if there is no video output:

- A:** 1. Make sure all cables are firmly inserted into the ports
2. USB-C port on the source device can support USB-C Display Alt-Mode for video output.
3. Check if the distance is too far. Note: that obstacles, walls, may reduce the distance.

**Q:** What if the laptop need power but the USB-C port is taken by the transmitter?

**A:** Plug the power cord of the laptop to USB-C female port on the transmitter and the laptop can be powered.

**Q:** Can conference or sports camera with USB-C interface use this wireless transmitter to transfer the video?

**A:** No, USB-C port on conference or sports camera usually support UVC mode instead of Display Alt-Mode

**Q:** How will the resolution of the display change?


**A:** The receiver (RX) will display the resolution according to the connected monitor (the max output resolution is 3840\*2160@60, which means that if the TV is only 1080p, it will only display at 1080P, if the TV is 4K, it will display at 4K)

If you have any questions , please contact our after-sale support




support@rgbblink.com

# ICoX nano 4K USB-C

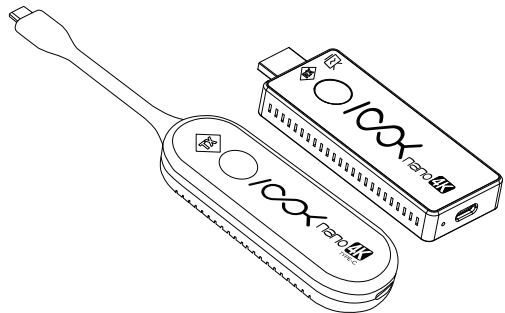

## USER MANUAL

## Overview

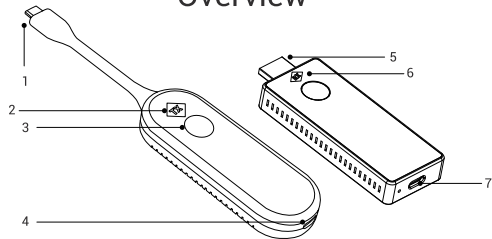

### ASK nano 4K USB-C Transmitter (TX)

1. USB-C plug (connect to laptop)
2. Indicator light

Status	Meaning
Solid Red	Powered
Blinking Red	TX is searching for RX
Blinking Blue	Waiting for connection
Solid Blue	Connected

3. Cast button
  - o Short press to stop/continue projecting
4. USB-C (female) for power supply

### ASK nano 4K Receiver (RX)

5. HDMI jack (connect to display)
6. Indicator light

Status	Meaning
Blinking Blue	Ready for casting

- 7.USB-C For power supply

## Quick Start

STEP 1 : Connect RX to HDMI IN on TV, projector or other devices and power it with USB A-C cable.

STEP 2 : Connect TX to USB-C port on PC or laptop.




TV or projector



PC/Mac

### Step 1

Connect ASK nano 4K RX to a display or projector



### Step 2

Start casting, projecting or mirroring from your choice of device

