



# RGBlink®



## mini-mx SDI

### 10 Channel Streaming Video Mixer


mini-mx SDI features four 4K HDMI 2.0 inputs and four 3G SDI inputs, one UVC and one NDI bi-directional input & output. It supports digital embedded audio and video signals from a PC, cameras, and more. Additionally, it has analog audio input options via 2 x Phantom, 1 x Line - in and 1 x MIC, and also supports Bluetooth audio.

There are two separate HDMI outputs for multi-viewer Preview, Program or Test Pattern. One USB 3.0 output supports YUY2 and MJPEG capture formats, which can be recognized as a webcam for streaming to Facebook, YouTube, ZOOM, etc.

The UVC can be used bidirectionally for USB disk recording, wireless speaker and wireless microphone. This function can be applied to devices such as RGBlink AI mini. The Ethernet port with NDI license enable is bi-direction too, which ensures that the NDI encoder and decoder can work at the same time. mini-mx SDI is built in with 5.5-inch TFT touch panel for menu operation and multiviewer video display.

Compared with mini-mx, mini-mx SDI has 4 more 3G SDI inputs and a ready to license bidirectional NDI, also Noise Reduction, Equalizer, Echo, Reverberation, Voice Fusion for audio inputs. Else it features including dynamic output control, multiviewer, picture in picture, chroma Key, transitions, on board PTZ camera controls and much more.

mini-mx SDI is web APP ready, also integrated with TAO Cloud for remote control and can stream to at least 4 content platforms at the same time.

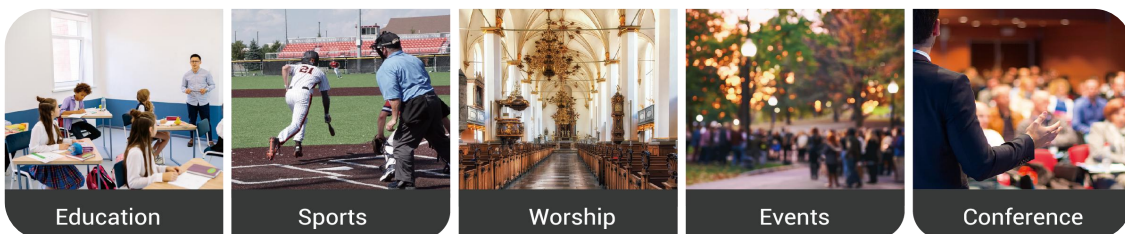

#### mini-mx VS mini-mx SDI

The core functions of mini-mx and mini-edge SDI remain largely consistent. However, mini-mx SDI outshines mini-mx in multiple aspects, offering a more comprehensive feature set and exceptional audio processing capabilities. The specific functional disparities are as follows:


1. Add four 3G SDI inputs, achieving perfect 4K audio signal transmission.
2. IN5 is user defined by UVC and NDI
3. Advanced audio function support: Noise Reduction, Equalizer, Echo, Fusion and Reverberation.
4. Output NDI and RTMP(s) at the same time
5. NDI PTZ access by one ethernet cable for both media content and remote control;
6. AI mini identification once AI mini is recognized by the device, both in the menu and TAO cloud;
7. USB3.0 port is VMix compatible and allows higher image quality

## Key Features


- Embedded 5.5-inch TFT and touchscreen
- 10 input connectors ( 4 x HDMI 2.0, 4 x 3G-SDI, 2K UVC, and 2K NDI)
- 6-CH customizable video inputs
- Maximum 8 channels for audio mixing
- Dynamic text overlay/scoreboard
- Configurable VFA (video follow audio)
- 2-CH independent HD HDMI

- 2K streaming and live via IP and UVC
- Streaming supports NDI | HX2
- Streaming and management via RGBlink TAO Cloud
- Manual real-time control of PTZ cameras, such as zoom in/out, rotation, and focus, via VISCA or NDI
- Third-party control and integration via free RGBlink Central Control Protocol

## Application

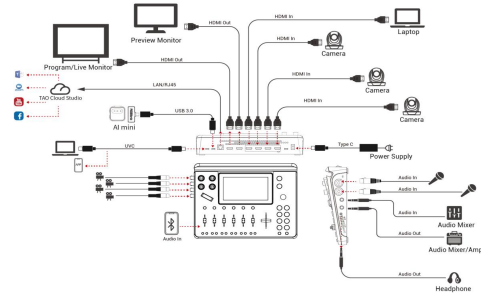

## Dimension

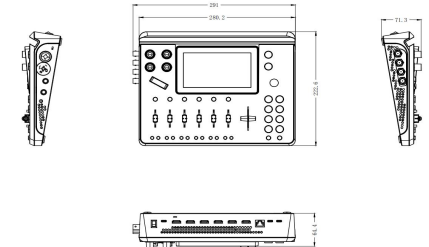

## Specification

| Product Model |                     | mini-mx SDI                 | mini-mx  |
|---------------|---------------------|-----------------------------|--|
| Connectors    | Input               | HDMI 4K                     | 4 x HDMI-A   |
|               |                     | 3G SDI                      | 4 x 3G SDI   |
|               |                     | NDI                         | 1 x NDI  |
|               | Output              | HDMI 2K                     | 2 x HDMI-A   |
|               |                     | USB (Record)                | 1 x USB-C  |
|               |                     | USB (Stream)                | 1 x USB-C  |
|               | Audio               | MIC IN 1                    | 1 x 6.35mm XLR + TS Jack (48V Phantom Power)   |
|               |                     | MIC IN 2                    | 1 x 6.35mm XLR + TS Jack   |
|               |                     | LINE IN                     | 1 x 6.35mm TRS Jack  |
|               |                     | OUT                         | 1 x 6.35mm TRS Jack  |
|               |                     |                             | 1 x 3.5mm mini-Jack  |
|               | Communication       | LAN                         | 1 x RJ45   |
| Performance   | Power               | Power Supply                | 1 x USB-C  |
|               | Input Resolution    | HDMI                        | 1280 x 720@50/59.94/60   1024 x 768@60   1280 x 768@60   1280 x 800@60   1280 x 1024@60   1360 x 768@60   1366 x 768@60   1440 x 900@60   1600 x 1200@60   1680 x 1050@60   1920 x 1200@60   1920 x 1080i@50/59.94/60   1920 x 1080p@23.98/24/25/29.97/30/50/59.94/60   3840 x 2160p@30/50/60   4096x2160@30/50/60 |
|               |                     | HDMI/USB (Webcam)           | 1280 x 720@50/60   1920 x 1080@24/25/30/50/60  |
|               | Video               | Video Formats               | HDMI 2.0   HDCP 2.2  |
|               |                     | Color Space                 | RGB 8bit   |
|               |                     | Video Sampling              | 4:4:4 YUV  |
|               |                     | Video Latency               | <4 frames  |
|               | Audio               | Line In Delay               | up to 8 frames   |
|               |                     | Audio Format                | HDMI Linear PCM, 24 bits/48 kHz, 2 ch<br>USB Linear PCM, 16 bits/48 kHz, 2 ch  |
|               | Record/Storage      | Record Formats              | MP4  |
|               |                     | Disk Formats                | FAT32(≤32 GB)   exFAT(64GB~2T)   |
|               | Supported Standards | HDMI                        | 2.0  |
|               |                     | USB                         | 3.0  |
|               |                     | H.265                       | ITU-T H.265/ ISO/IEC 23008-2   |
| Power         | Compatibility       | USB Power Delivery (PD) 3.0 |  |
|               | Supported Cables    | Certified USB PD Aware      |  |
|               | Input Voltage       | USB-C 12V/3.3A              |  |
|               | Maximum Power       | 40W                         |  |
| Environment   | Temperature         | 0℃~45℃                      |  |
|               | Humidity            | 10%~85% RH                  |  |
| Physical      | Net Weight          | 1.48kg                      |  |
|               | Packaged Weight     | 2.80kg                      |  |
|               | Net Dimension       | 291mm x 222.6mm x 71.3mm    |  |
|               | Packaged Dimension  | 332.0mm x 238.5mm x 109.0mm |  |

## Order Codes

| Order Codes   | Item        |
|---------------|-------------|
| 230-0009-01-0 | mini-mx SDI |

## Contact us

Tel: +86-592-5771197  
Fax: +86-592-5788216  
E-mail: sales@rgblink.com  
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,  
Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

