

MSP231

HDMI To USB 3.0 Capture




Key Features

- Plug and play, driver free
- Support input up to YUV420 3840x2160@60 8BIT
YCbCr422 1920x1080@60 10BIT , YCbCr422 1920x1080@60 12BIT
- Linear audio mix and audio output
- HDMI in and loop
- USB 3.0 putput and power supply

Specification

Connectors	Input	HDMI	2×HDMI-A (1 in 1 loop)
		Audio	1×3.5mm Jack
	Output	USB 3.0	1×USB-A
		Audio	1×3.5mm Jack
Performance	Input Resolutions	HDMI IN	
		CTA	480p@60 576p@50 720p@50/60/100/120 1080i@50/60 1080p@24/25/30/50/60 2160p@24/25/30
	Captured Resolution	USB	
		YUY2 MJPEG	1920*1080@60 1600*1200@60 1360*768@60 1280*1024@60 1280*960@60 1280*720@60 1024*768@60 800*600@60 720*576@60 720*480@60 640*480@60
	Supported Standard	HDMI	2.0
		USB	3.0
Power	Input Voltage	DC 5V/1A	
Enviroment	Working Temperatur	-0 ~50°C	
	Humidity	20 - 90%	
Physical	Weight	Net (Device)	0.01kg
	Dimensions	Net (Device)	100mm×60mm×11mm

Application

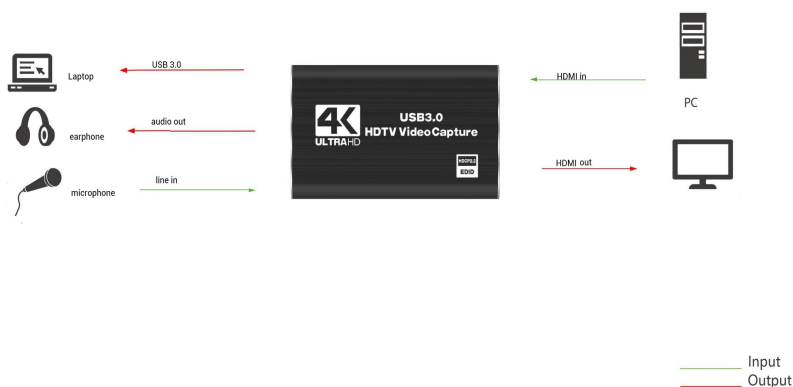

Order Codes

Product Code	Item
601-0231-00-1	MSP231

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza,
 Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
 www.rgblink.com

